


WPO-2000

Water Powered Monitor Oscillator

The WPO-2000 designed to provide up to 30°/sec oscillation speed when installation between a monitor and a valve, is the most versatile and reliable water powered monitor oscillator system available to the fire protection industry today. The WPO-2000 system has US patent pending, and is suitable for installation in corrosive and non-corrosive environments.

Features:

- Maintenance free waterway
- Modular oscillator design enables compatibility with several types of monitors
- 316 Stainless steel construction provides outstanding corrosion resistance for use in corrosive environments
- Easily accessible external controls enable speed and travel range adjustments while system is in operation
- Double reduction oil bath gearbox ensures reliability and extended life for heavy use
- Manual override feature enables manual control at any time as desired
- 15° to 120° arc of oscillation range for wide coverage area
- 10 psi (0.69 bar) minimum & 200 psi (13.8 bar) maximum operating pressure
- Supports wide range of monitors with up to 2000 GPM (7570 LPM) flow rates
- Compact size enables ease of installation
- Testing with garden hose without flowing monitor

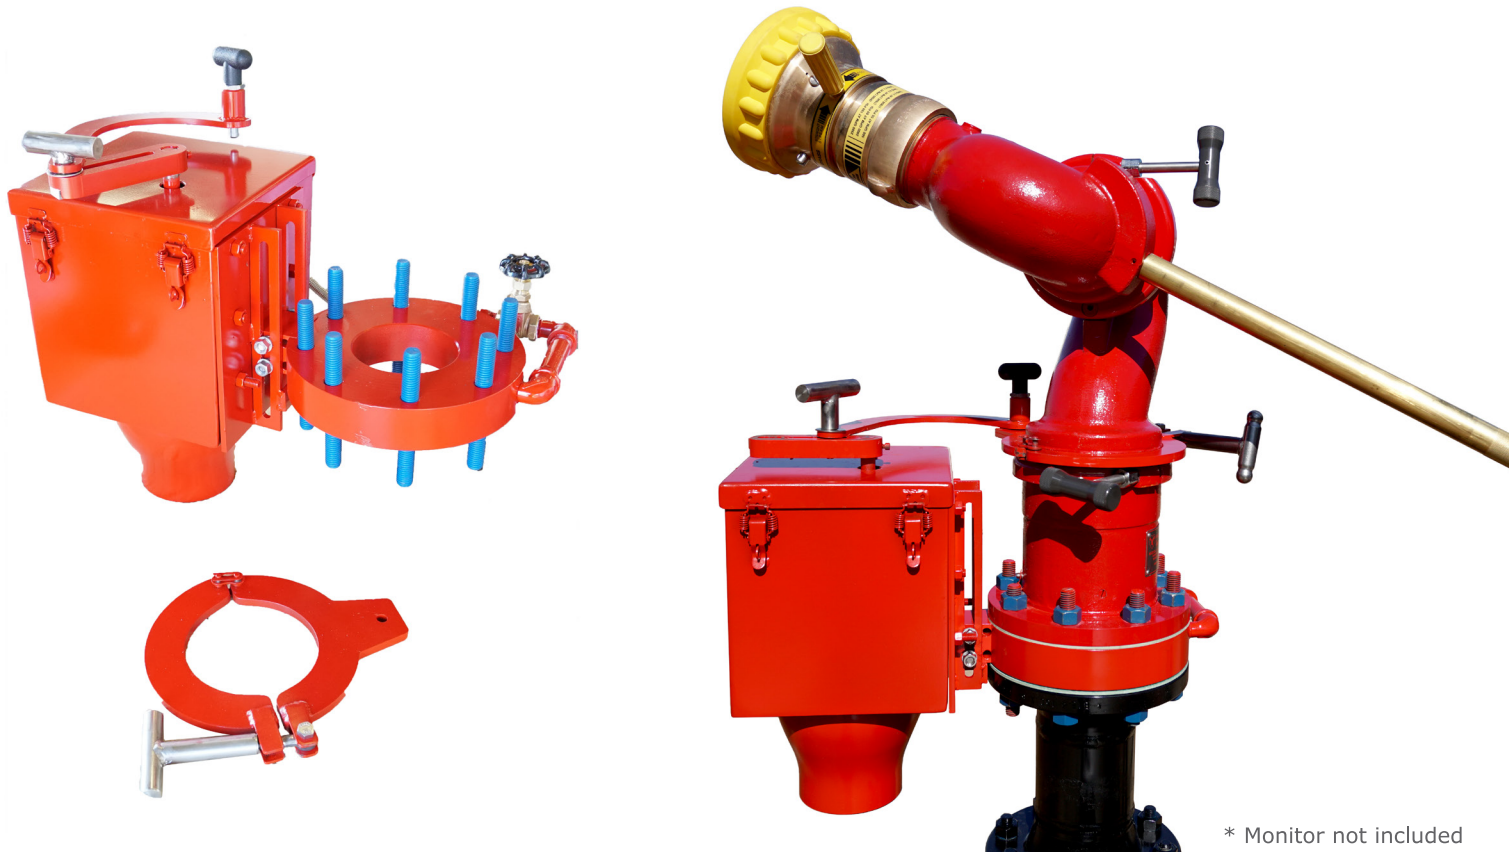

* Monitor not included

WPO-2000

Water Powered Monitor Oscillator

SPECIFICATIONS	
Model	WPO-2000
Inlet	4"-150# Flange
Material	316 stainless steel construction
Speed	0-30°/sec oscillating speed range 24°/sec max @ 100 psi (6.9 bar)
Arc of Oscillation	15° to 120°
Max Operating Pressure	200 psi (13.8 bar)

Warranty:

- 5-Year limited warranty

Certifications:

- FM approval pending

