

# HANDLINE NOZZLES



MYSTERY®

## Mystery®

The Mystery® Nozzle incorporates a twist-type shut-off, opening in straight stream and producing a flow from straight stream to wide fog. In combination with a B-375A ball shut-off, the Mystery® Nozzle promotes an extremely convenient method of advancing hoselines. Simply close the ball shut-off, remove the Mystery® tip, attach additional hose, and then reattach the tip at the end of the line. The tip's built-in shut-off allow for the line to be advanced rapidly without bringing in an additional nozzle.

HANDLINE NOZZLES

1-15



British Standard Parallel Pipe (BSPP) base options available.

Base Size	AVAILABLE STANDARD FLOW RATE GPM (LPM)							BREAK-APART COMPONENTS		GRIP	SHUT-OFF	HANDLE	BASE	TEETH	DIMENSIONS		MODEL	FIGURE							
	60 (227)	95 (360)	125 (473)	170 (644)	200 (757)	250 (946)	Tip	Shut-Off*	Smooth Bore**						Pistol Grip	Twist Ball			Tab	Horseshoe	Rigid Swivel	Free Swivel	Cut Metal	Length (Inches)	Weight (Lbs.)
	PSI (BAR)																								
1.5"	•	•	•	•	•	•								s		s	4.625	1.375	L-205-BA (Tip Only)	1					
	•	•	•	•	•	•		L-205-BA	LB-275A	•	•	•	o	s	o	s	o	s	8.50	3.50	LB-275-AF	2			
		•	•	•	•	•				•	•	•	o	s	o	s	o	s	7.125	3.25	205-BA (Tip Only)	1			
		•	•	•	•	•		205-BA	B-375AT	•	•	•	o	s	o	s	o	s	12.875	6.25	B-375-ATF	3			
		•	•	•	•	•		205-BA	B-375GAT	•	•	•	o	s		o	s	s	13.25	6.75	B-375-GATF	3			
2.5"	•	•	•	•	•	•					•	•	•	•	s		s	7.50	3.50	D-205-BA (Tip Only)	1				
	•	•	•	•	•	•	D-205BA	JB-275A		•	•	•	s		s	s	13.625	7.50	JB-275-LAFD	4					


Key s = standard o = option

\* Break-apart nozzles list standard configuration for shut-offs.

\*\* Listed flow rate for break-apart nozzle with integral smooth bore is for Mystery® nozzle tip only.

Smooth bore discharge size may restrict flow of Mystery® tip. 15/16" discharge standard on 1.5" base; 7/8", 1", 1 1/8", 1 1/4" available. 1 1/4" discharge standard on 2.5" base; 7/8", 15/16", 1", 1 1/8" available.

## MYSTERY® CONFIGURATIONS

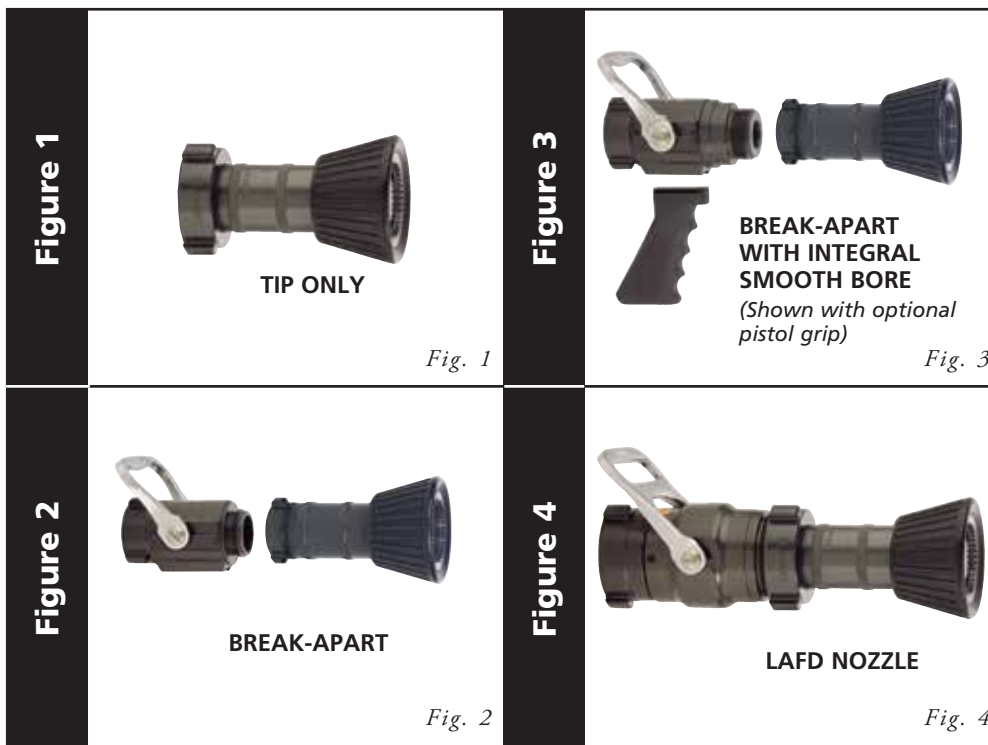

OPTIONS	
<b>HANDLES</b>	
TAB	HORSESHOE
	
<b>THREADS</b>	
All nozzles are NHT unless otherwise specified. See index T-13 for optional base threads, including British instantaneous.	
<b>BREAK-APART COMPONENTS</b>	
Ball shut-offs and/or playpipes referenced here may be found on page 1-24.	

Figures depict general product types only and are not intended to be inclusive of all product features.