


# APPARATUS FITTINGS

## 90° DISCHARGE & SUCTION SWIVEL ELBOWS

FEMALE INLET SIZE / TYPE			MALE OUTLET			MOUNT OPTIONS		MOUNTING SPACE		TWIST LOCK	BUILT-IN STRAINER	BALL RACE		MATERIAL	Weight (Lbs.)	MODEL	FIGURE	
(Inches)	SWIVEL			(Inches)			Stud	Flange	(Inches)			Single	Double					
	NPT	NPSH	NHT	NHT	NPSH	NPT			A									B
1.5	•			1.5					2.5	3.8			•	•	2.9	348	1	
	•					1.5			2.5	3.8			•	•	2.9	348	1	
	•			1.5					4.0	3.8			•		3.5	348L	2	
		•		1.5					4.0	3.8			•		3.5	348L		
2.0	•			1.5					2.5	4.0			•		3.0	348	1	
	•			1.5					4.0	4.0			•		3.7	348L	2	
	•				1.5				4.0	4.0			•		3.7	348L	2	
	•			1.5			•		2.5	4.0			•		3.3	348M		
	•			1.5			•		4.0	4.0			•		3.4	348ML	4	
	•				1.5		•		4.0	4.0			•		3.4	348ML	4	
2.5	•			2.5					5.0	6.2			•		11.8	348	1	
				2.5			•	•	5.0	6.3			•		11.8	348M	3	
4.0	•					4.0			6.0	8.0	s		•		30.3	348	5	
5.0	•			5.0					6.8	9.5	s	s	•		45.0	348	5	
	•			6.0					6.4	9.5	s	s	•		48.5	348	5	


KEY s = standard o = option

### ELBOW CONFIGURATIONS

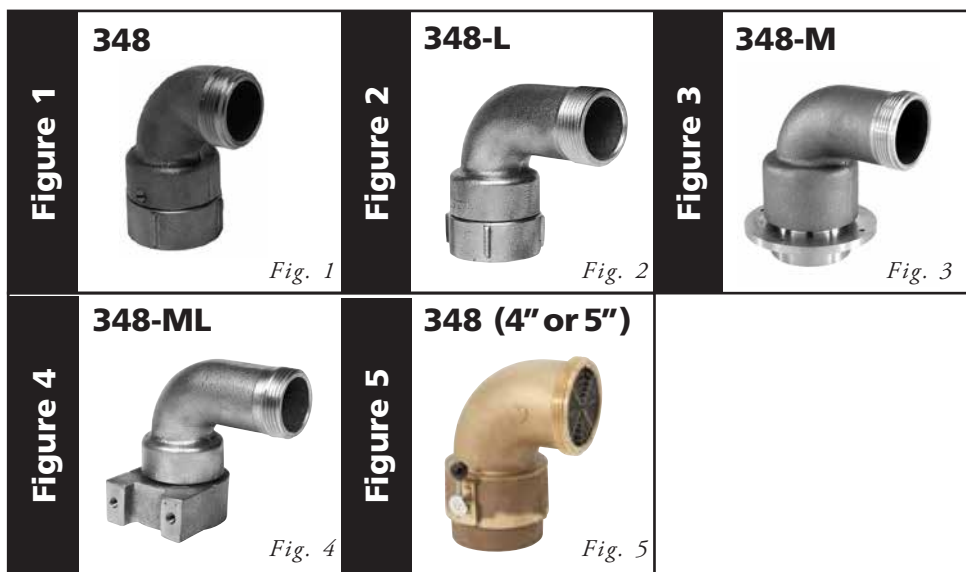

Figures depict general product types only and are not intended to be inclusive of all product features.

### MOUNTING SPACE DIAGRAM

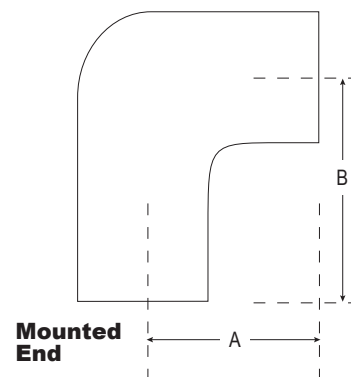

### MOUNT OPTIONS

#### SIDE



#### FLANGE



### OPTIONS

Polished and rough chrome finish are available on some brass models. Please inquire with our sales staff.

### THREADS

All hose threads are NHT unless otherwise specified. See index T-13 for optional base threads.