

INDUSTRIAL VALVES



ANGLE

Angle

Elkhart's angle valves all feature rugged cast brass construction in your choice of finishes. Additionally, all feature rubber seats and are rated at 300 psi (20.68 bar).



**U Series valves
not intended for
use in salt water
applications.**



INDUSTRIAL VALVES

10-7

INLET SIZES		OUTLET SIZES				CERTIFICATIONS		BRASS FINISH			DIMENSIONS (Inches)					Weight (Lbs.)	MODEL	FIGURE
Female		Female		Male		FM App'd	UL Listed	Cast	Polished	Chrome Polished	Swing Radius	A	B	Height				
1½"	2½"	1½"	2½"	1½"	2½"									Open	Closed			
•		•				•	•	s	o	o	2½	2 ³ / ₁₆	4	7 ⁷ / ₈	6 ⁷ / ₈	6	U-20-1.5	1
	•		•			•	•	s	o	o	3 ⁵ / ₈	3 ¹ / ₄	5	11	9 ³ / ₈	11 ³ / ₄	U-20-2.5	1
•				•		•	•	s	o	o	2½	2 ³ / ₁₆	4	7 ⁷ / ₈	6 ⁷ / ₈	6	U-25-1.5	2
	•				•	•	•	s	o	o	3 ⁵ / ₈	3 ¹ / ₄	5	11	9 ³ / ₈	11 ³ / ₄	U-25-2.5	2

KEY s = standard o = option

Figure 1

U-20



Fig. 1


Figure 2

U-25



Fig. 2

DIAGRAM

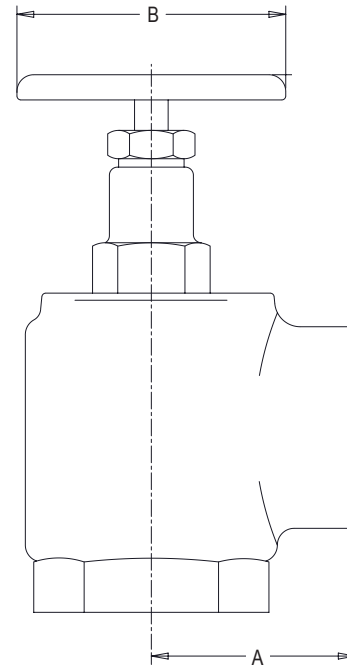

ADDITIONAL INFORMATION

THREADS

Valve inlet information is in NPT unless otherwise specified. See index T-13 for alternative outlet thread options.