


INLET SIZES							2.5" OUTLET OPTIONS			MATERIAL		DIMENSIONS		MODEL	FIGURE
Female	Male		2.5" Flange				Male NPT	Vic-taulic	NHT	Cast Brass	Elk-O Lite®	Length (Inches)	Weight (Lbs.)		
2.5"	2.5"	3"	Ameri-can	Darley	Hale	Water-ous									
•							s			•		6.3	11.1	40-10	1
			•		•	•	s	o	o	•		6.8	11.2	40-20	1
				•			o	s		•		6.1	11.1	40-22	1
	™						s			•		6.8	10.9	40-32	2
	•						s	o		•		6.5	10.6	40-40	2
		•					s	o		•		6.1	10.9	40-41	2
•							s				•	6.3	3.5	40A	

KEY s = standard o = option ™ = NHT

40 RELIEF VALVE

- For use on the suction side of the pump or on a designated LDH discharge outlet
- Material: Choice of cast brass or Elk-O-Lite® with stainless steel mechanism
- Rubber seat to ensure positive vacuum seal
- Adjustable psi of 75-250 (pre-set to 125 psi)

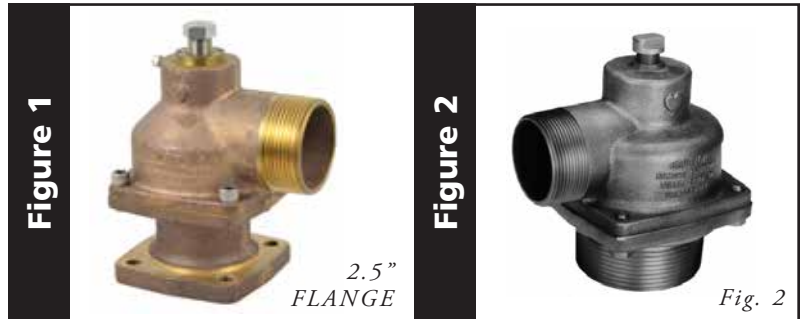

Figures depict general product types only and are not intended to be inclusive of all product features.

PUSH/PULL DRAIN VALVE



110



115

Product Information	MODELS	
	110	115
Mounting	Direct	Panel
Inlet	0.75" NPT Female	
Outlet	.75" NPT Female	Male shank outlet for .75" ID drain hose
Handle length	2.25"	
Optional handle lengths	4.375", 3.0", or 1.5" (specify)	
Material	Cast brass valve body with stainless steel handle rod	
Additional features		Body pre-drilled for mounting

116 QUARTER TURN DRAIN VALVE

- Panel mounted
- Body pre-drilled for mounting to pump panel
- Material: Cast brass valve body with stainless steel handle rod
- Inlet: 0.75" NPT
- Outlet: 0.75" NPT
- Machined brass ball
- Optional adapter with .125" NPT tap for gauge

