

# INDUSTRIAL VALVES



ANGLE

## Angle

Elkhart's angle valves all feature rugged cast brass construction in your choice of finishes. Additionally, all feature rubber seats and are rated at 300 psi (20.68 bar).



**U Series valves  
not intended for  
use in salt water  
applications.**



INLET SIZES		OUTLET SIZES				CERTIFICATIONS		BRASS FINISH			DIMENSIONS (Inches)					Weight (Lbs.)	MODEL	FIGURE
Female		Female		Male		FM App'd	UL Listed	Cast	Polished	Chrome Polished	Swing Radius	A	B	Height				
1½"	2½"	1½"	2½"	1½"	2½"									Open	Closed			
•		•				•	•	s	o	o	2½	2 <sup>3</sup> / <sub>16</sub>	4	7 <sup>7</sup> / <sub>8</sub>	6 <sup>7</sup> / <sub>8</sub>	6	U-20-1.5	1
	•		•			•	•	s	o	o	3 <sup>5</sup> / <sub>8</sub>	3 <sup>1</sup> / <sub>4</sub>	5	11	9 <sup>3</sup> / <sub>8</sub>	11 <sup>3</sup> / <sub>4</sub>	U-20-2.5	1
•				•		•	•	s	o	o	2½	2 <sup>3</sup> / <sub>16</sub>	4	7 <sup>7</sup> / <sub>8</sub>	6 <sup>7</sup> / <sub>8</sub>	6	U-25-1.5	2
	•				•	•	•	s	o	o	3 <sup>5</sup> / <sub>8</sub>	3 <sup>1</sup> / <sub>4</sub>	5	11	9 <sup>3</sup> / <sub>8</sub>	11 <sup>3</sup> / <sub>4</sub>	U-25-2.5	2

KEY s = standard o = option

Figure 1

U-20



Fig. 1


Figure 2

U-25



Fig. 2

DIAGRAM

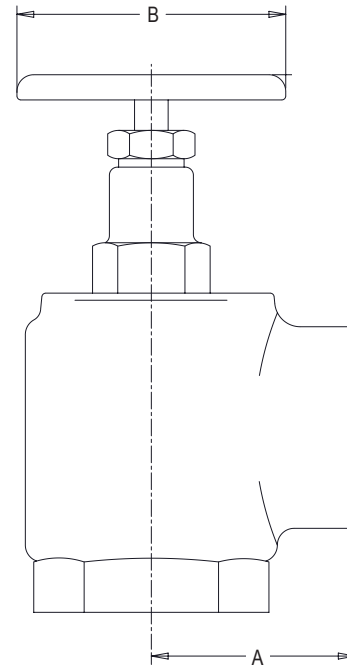

### ADDITIONAL INFORMATION

#### THREADS

Valve inlet information is in NPT unless otherwise specified. See index T-13 for alternative outlet thread options.