



BALL SHUT-OFFS & PLAYPIPES

Ball Shut-offs & Playpipes

Elkhart Brass Ball Shut-offs and Playpipes are designed and constructed for rugged use and reliable performance as well as an excellent foundation for your break-apart nozzle needs using either smooth bore or fog nozzles. Elkhart Brass Ball Shut-offs and Playpipes are available with a variety of options, including built-in smooth bores which can be used with a fog nozzle tip for maximum versatility.

HANDLINE NOZZLES

1-29



British Standard Parallel Pipe (BSPP) and British Instantaneous (BS336) base options available.

HANDLINE NOZZLES

BALL SHUT-OFFS & PLAYPIPES

BALL SHUT-OFFS & PLAYPIPES

Inlet Size	Outlet Size	WATERWAY SIZE						AVAILABLE INTEGRAL SMOOTH BORE DISCHARGE SIZE						BALL TYPES		SEAT		DRIVE		GRIP			BASE			HANDLE		MATERIAL		MODEL	FIGURE	
		1"	1 3/8"	1 1/2"	1 3/4"	1/2"	7/8"	1 1/8"	1 1/4"	1 1/2"	1 3/4"	1 1/2"	1 3/4"	1 1/2"	1 3/4"	Double	Full Round	Single	Double	Double	Pistol Grip	Playpipe	Ladderhook	Rigid	Swivel	Free Swivel	Tab	Horseshoe	Brass			Elk-O-Lite®
1"	1"														S								S		O	S	O			SB-275	1	
															S									O		S	S	O			SB-275-A	1
															S									O		S	S	O			SB-275-AT	2
															S									O		S	S	O			SB-275-G	3
															S									O		S	S	O			SB-275-GA	3
															S									O		S	S	O			SB-275-GAT	4
1.5"	1.5"														S								O	S	O	O	S			LB-275	1	
															S								O	S	O	O	S			LB-275-A	1	
															S								O	O	S	O	S			LB-275-GA	3	
															S								O	S	O	O	S			B-275	1	
															S								O	S	O	O	S			B-275-A	1	
															S								O	O	S	O	S			B-275-GA	3	
															O	S									S	O	O	S			B-375-A	1
															O	S									S	O	O	S			B-375-AT	2
															O	S									O	S	O	S			B-375-GA	3
															O	S									O	S	O	S			B-375-GAT	4
2.5"	1.5"														S								O	S	O	O	S			DB-275	1	
															S								O	S	O	O	S			DB-275-A	1	
															S								O	O	S	O	S			DB-275-GA	3	
															O	S									S	O	S			DB-375-A	1	
															O	S									S	O	S			DB-375-GA	3	
															S										S	O	S			DB-375-AT	2	
															S										S	O	S			DB-375-GAT	4	
															S										S	S				B-278	5	
															S										S	S				B-278-AT	5	
															S										S	S				B-278-L	5	
															S										S					279-L	6	
															S										S					279-LA	6	
2.5"	2.5"														S								S			S			JB-275	1		
															S									S		S			JB-275-A	1		
															S									S		S			JB-275-GA	3		

Key: s = standard o = option
 *B-278 (without ladderhook) + ST-190-BA (Triple Stack Tip)

See section 1-6 for available XD Shutoffs and Playpipes

HANDLINE NOZZLES

1-30

HANDLINE NOZZLES



BALL SHUT-OFFS & PLAYPIPES

HANDLINE NOZZLES

1-31

BALL SHUT-OFFS AND PLAYPIPES CONFIGURATIONS

Figure 1 SHUT-OFF 	Figure 2 SHUT-OFF with INTEGRAL SMOOTH BORE 
Figure 3 SHUT-OFF with PISTOL GRIP 	Figure 4 SHUT-OFF with PISTOL GRIP & INTEGRAL SMOOTH BORE 
Figure 5 PLAYPIPE with SHUT-OFF 	Figure 6 PLAYPIPE without SHUT-OFF 

Figures depict general product types only and are not intended to be inclusive of all product features.

DOUBLE CUT-AWAY


Ball is hydraulically balanced for a smooth transition from closed to open and open to closed.

FULL ROUND

Ball has a solid bore for optimal flow characteristics and stream quality — particularly for smooth bores and shut-offs with built-in smooth bores.

OPTIONS

COLORS

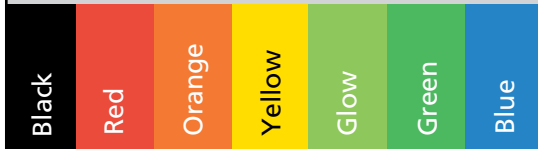

Color options available for pistol grip and handle. Ball shut-offs standards are a rough chrome handle and natural Elk-O-Lite® pistol grip.

HANDLES

TAB



HORSESHOE



THREADS

All nozzles are NHT unless otherwise specified. See index T-13 for optional base threads, including British instantaneous.