


REV.	DESCRIPTION	BY	E. C. N.
REL	(NOTE: ADDITIONAL ECN BLOCKS TO BE COPIED AND FILLED OUT MANUALLY) RELEASE TO PRODUCTION	BJS	150208

NOTE:
FOR COMMUNICATION BETWEEN OCP's AND HMI ,
INSTALL WITH EITHER DUPLEX MULTIMODE FIBER
OPTIC CABLE OR ETHERNET CONNECTIONS AS
SHOWN. SEE NETWORK CABLE CHART ON DWG
#81504095

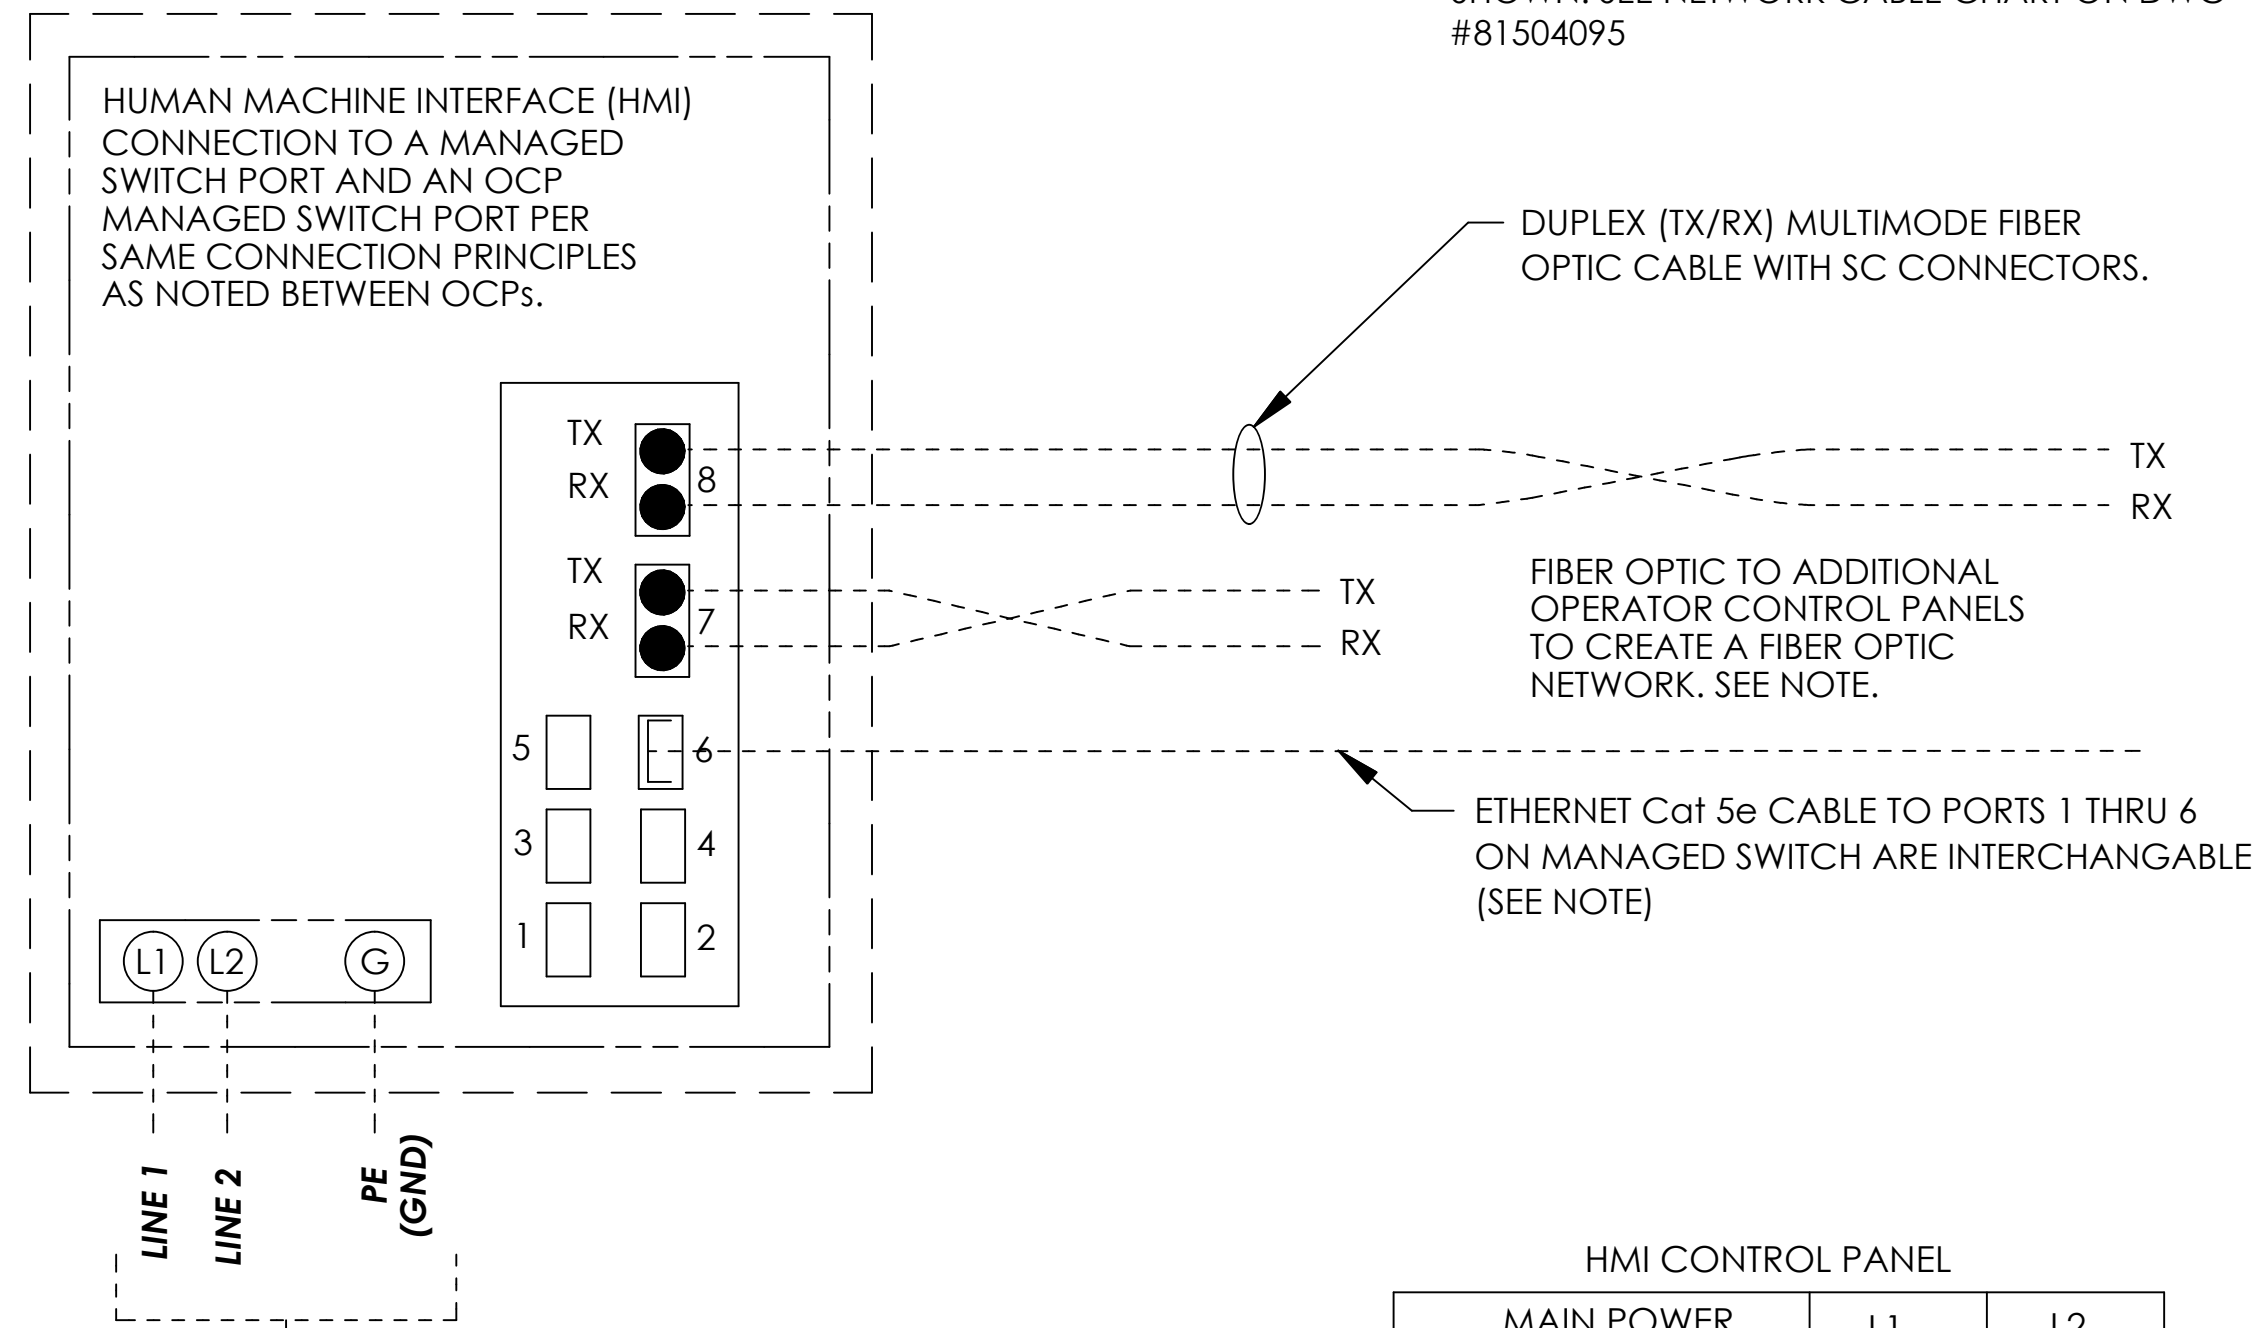

POWER SOURCE (SEE CHART FOR CONNECTIONS)
100 - 240 VAC 50/60 Hz., 1-Phase
4 AMPS MAX. (480 VA POWER)
1 AMP TYPICAL LOAD

INSTALLATION NOTE:
INSTALLER TO PROVIDE DISCONNECT
MEANS, BRANCH CIRCUIT MEANS, AND
OVERLOAD PROTECTION.

HMI CONTROL PANEL

MAIN POWER	L1	L2
110/120 VAC, 50/60 Hz.	LINE	NEUTRAL
220 VAC, 50 Hz.	LINE	NEUTRAL
240 VAC, 60 Hz.	LINE	LINE

REFERENCE DWG. #81504095 (MULTI-MONITOR SPITFIRE SYSTEM LAYOUT)
OR CUSTOM SYSTEM LAYOUT

ELKHART BRASS MFG. CO., INC. #1302 West Beardsley Ave, Elkhart, IN 46514, USA <small>This print and all data contained here on is the sole and exclusive property of Elkhart Brass Mfg., Co., INC. and will not be disclosed to others without the consent of Elkhart Brass Mfg., Co., INC. This print must be returned to Elkhart Brass Mfg., Co., INC. Copyright © 2013 by Elkhart Brass Mfg. Co., INC.</small>		DRAWN BY BS CHECKED BY BS DATE 02/18/2015 DATE 02/19/2015	ELKHART BRASS Fire Fighting Equipment
MATERIAL N/A		WEIGHT (LBS) N/A	DESCRIPTION HMI PANEL TO OCP ELECTRICAL INTERCONNECT DRAWING
TOLERANCE UNLESS OTHERWISE SPECIFIED 2 PLACE DEC. ± .060" 3 PLACE DEC. ± .030" ANGLES ± 1°		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES ALL FILLETS AND ROUNDS R 0.06 DO NOT SCALE PRINT INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M 1994 CAD MODEL:	CAT. NO. INDUSTRIAL SYSTEMS
		SIZE C	PART NUMBER 30231031S5
		REV. REL	SHEET 5 OF 9