


**CSW-L SERIES NOZZLES  
STRAIGHT STREAM REACH @ 350 GPM  
WITH ELEVATIONS OF 32 , 55 , & 75 DEGREES**


— 32 DEGREES  
— 55 DEGREES  
— 75 DEGREES

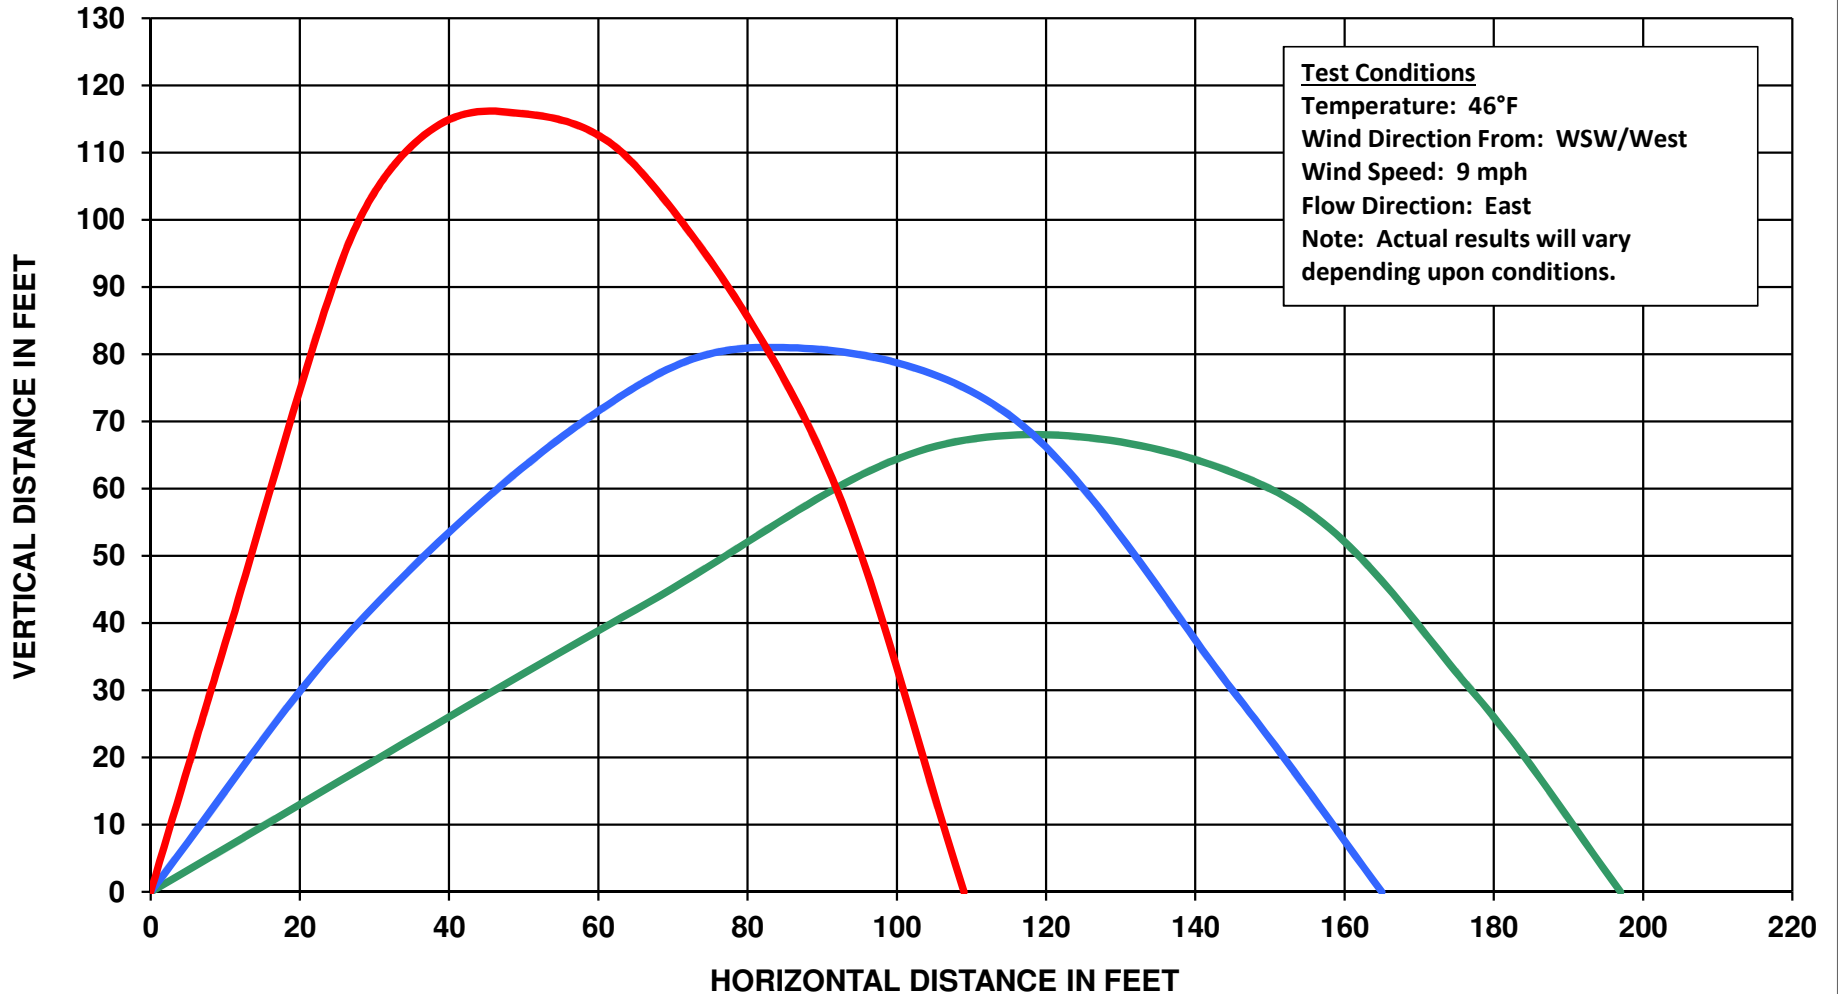

**CSW-L SERIES NOZZLES  
STRAIGHT STREAM REACH @ 500 GPM  
WITH ELEVATIONS OF 32 , 55 , & 75 DEGREES**


— 32 DEGREES  
— 55 DEGREES  
— 75 DEGREES

**Test Conditions**  
Temperature: 46°F  
Wind Direction From: WSW/West  
Wind Speed: 9 mph  
Flow Direction: East  
Note: Actual results will vary depending upon conditions.

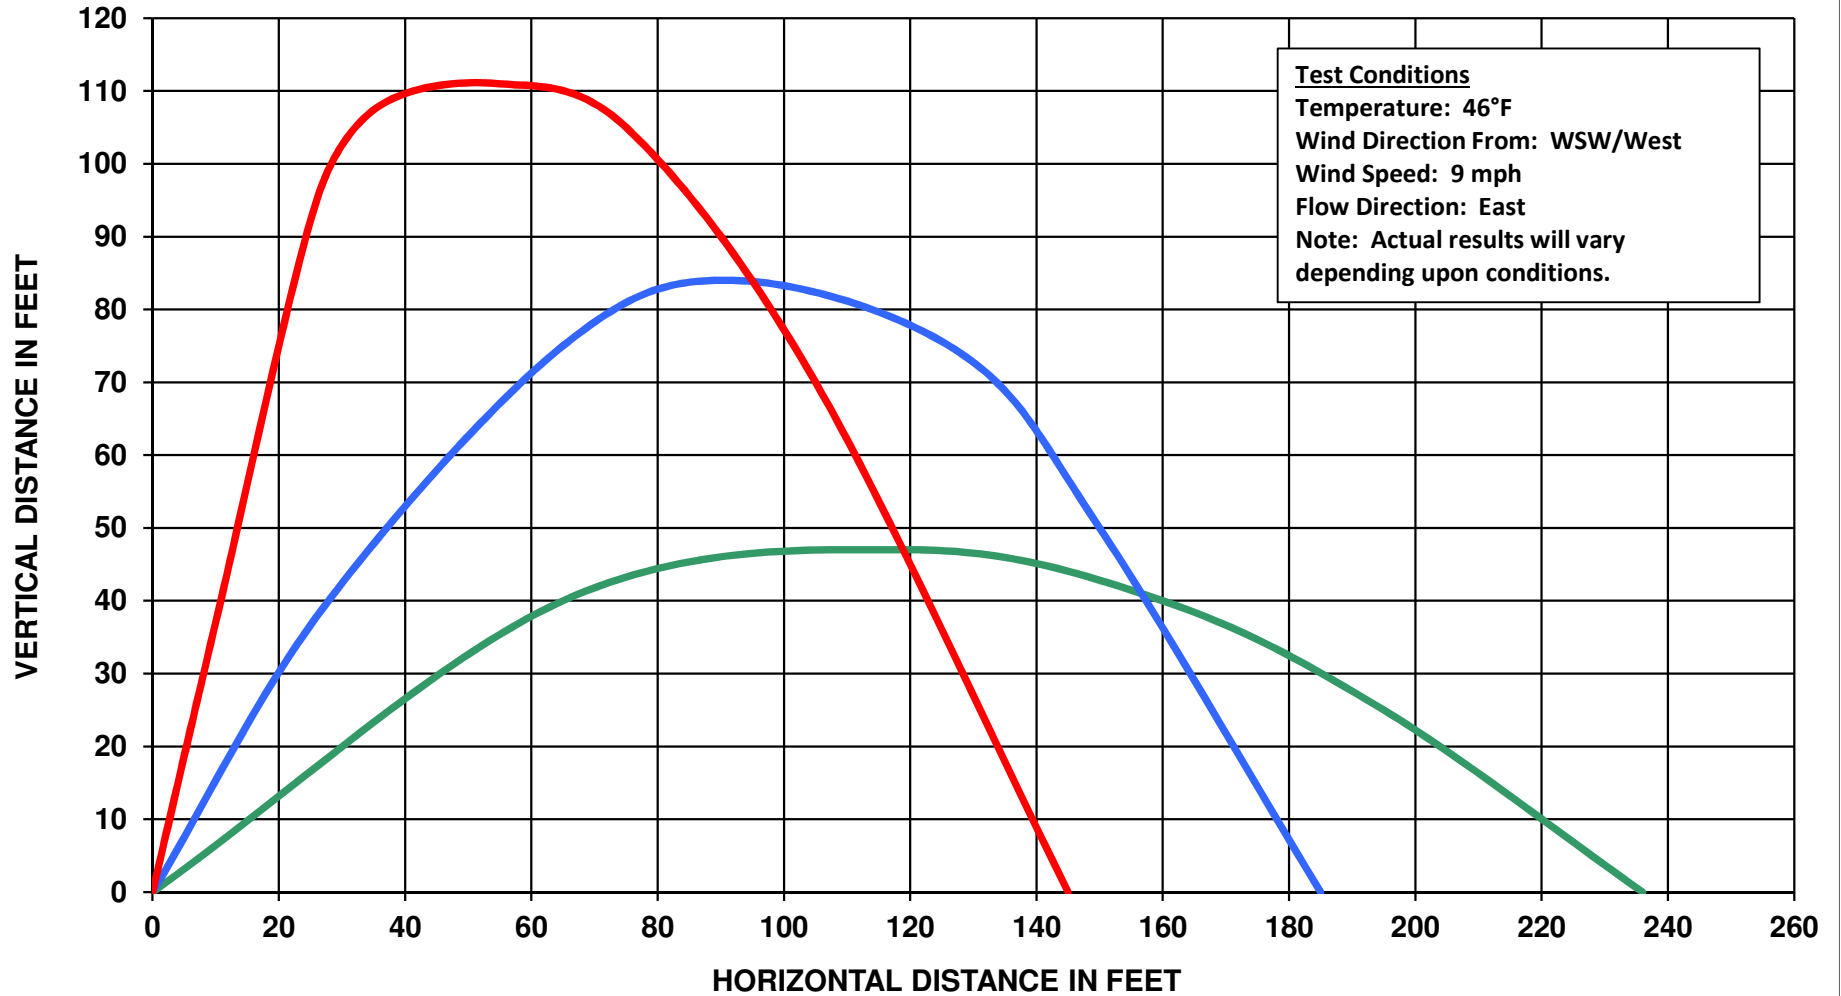

**CSW-L SERIES NOZZLES  
STRAIGHT STREAM REACH @ 750 GPM  
WITH ELEVATIONS OF 32 , 55 , & 75 DEGREES**


— 32 DEGREES  
— 55 DEGREES  
— 75 DEGREES

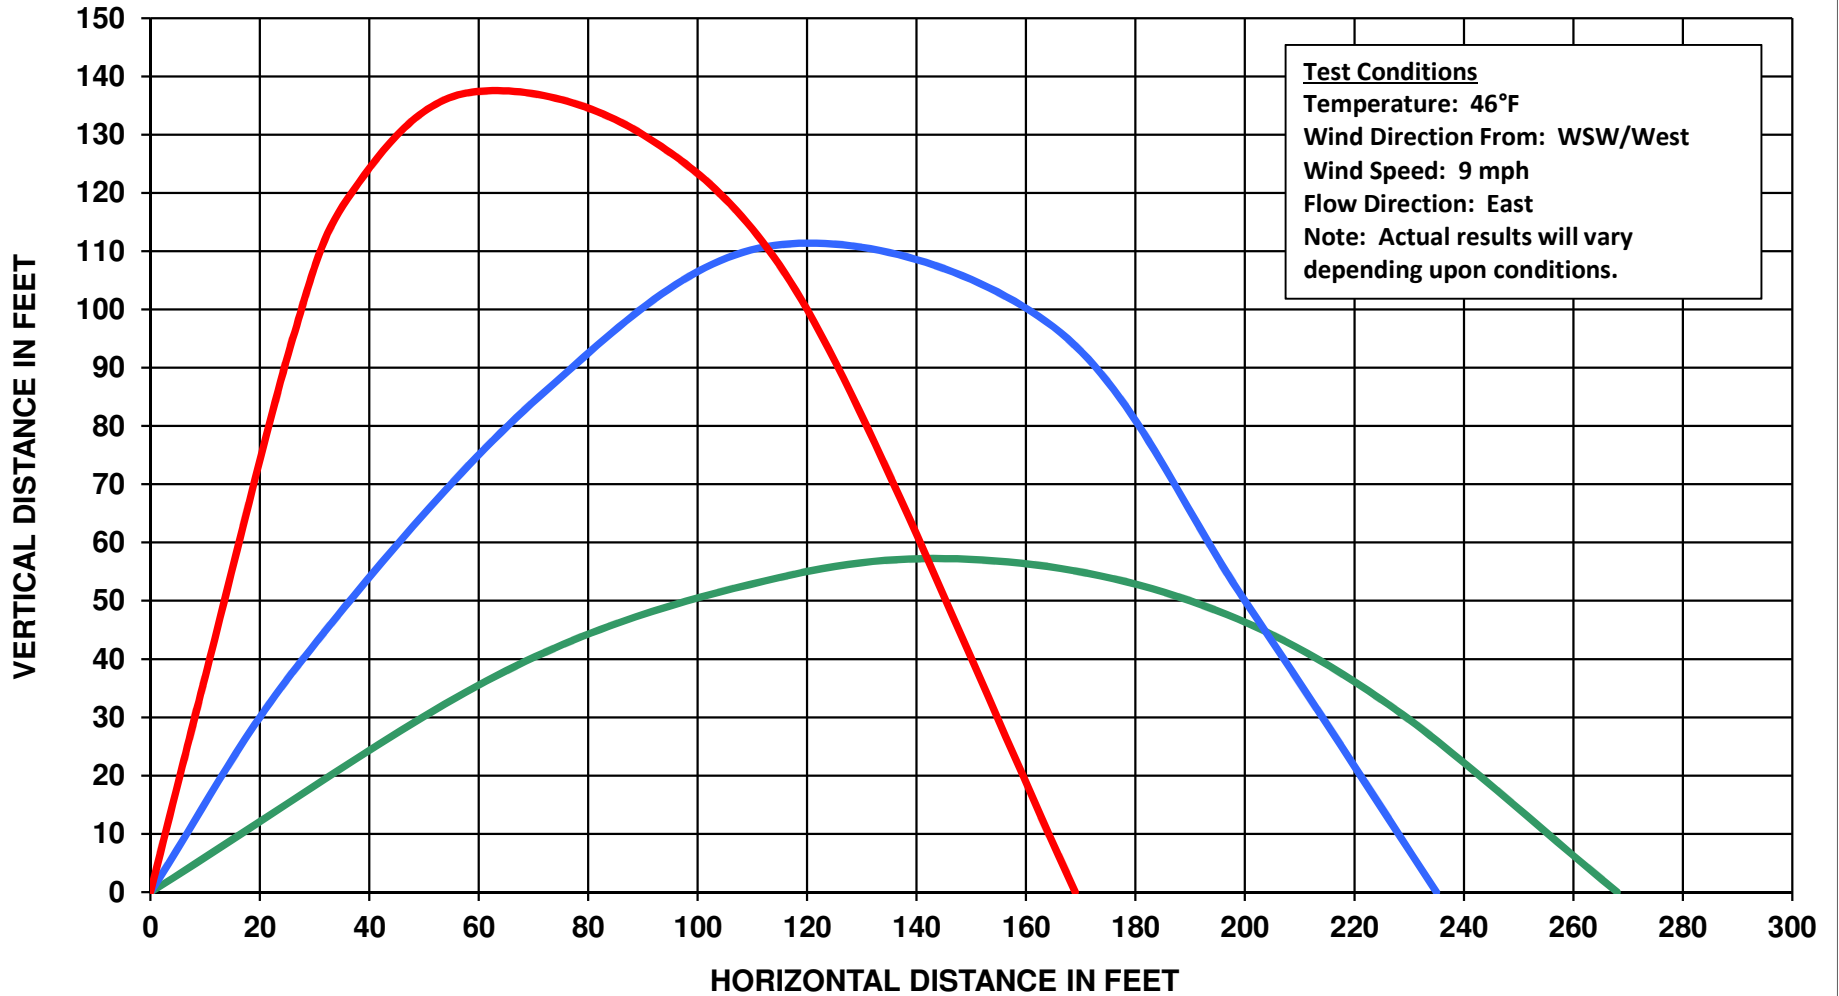

**CSW-L SERIES NOZZLES  
STRAIGHT STREAM REACH @ 1000 GPM  
WITH ELEVATIONS OF 32 , 55 , & 75 DEGREES**

— 32 DEGREES  
— 55 DEGREES  
— 75 DEGREES

**Test Conditions**  
Temperature: 46°F  
Wind Direction From: WSW/West  
Wind Speed: 9 mph  
Flow Direction: East  
Note: Actual results will vary  
depending upon conditions.

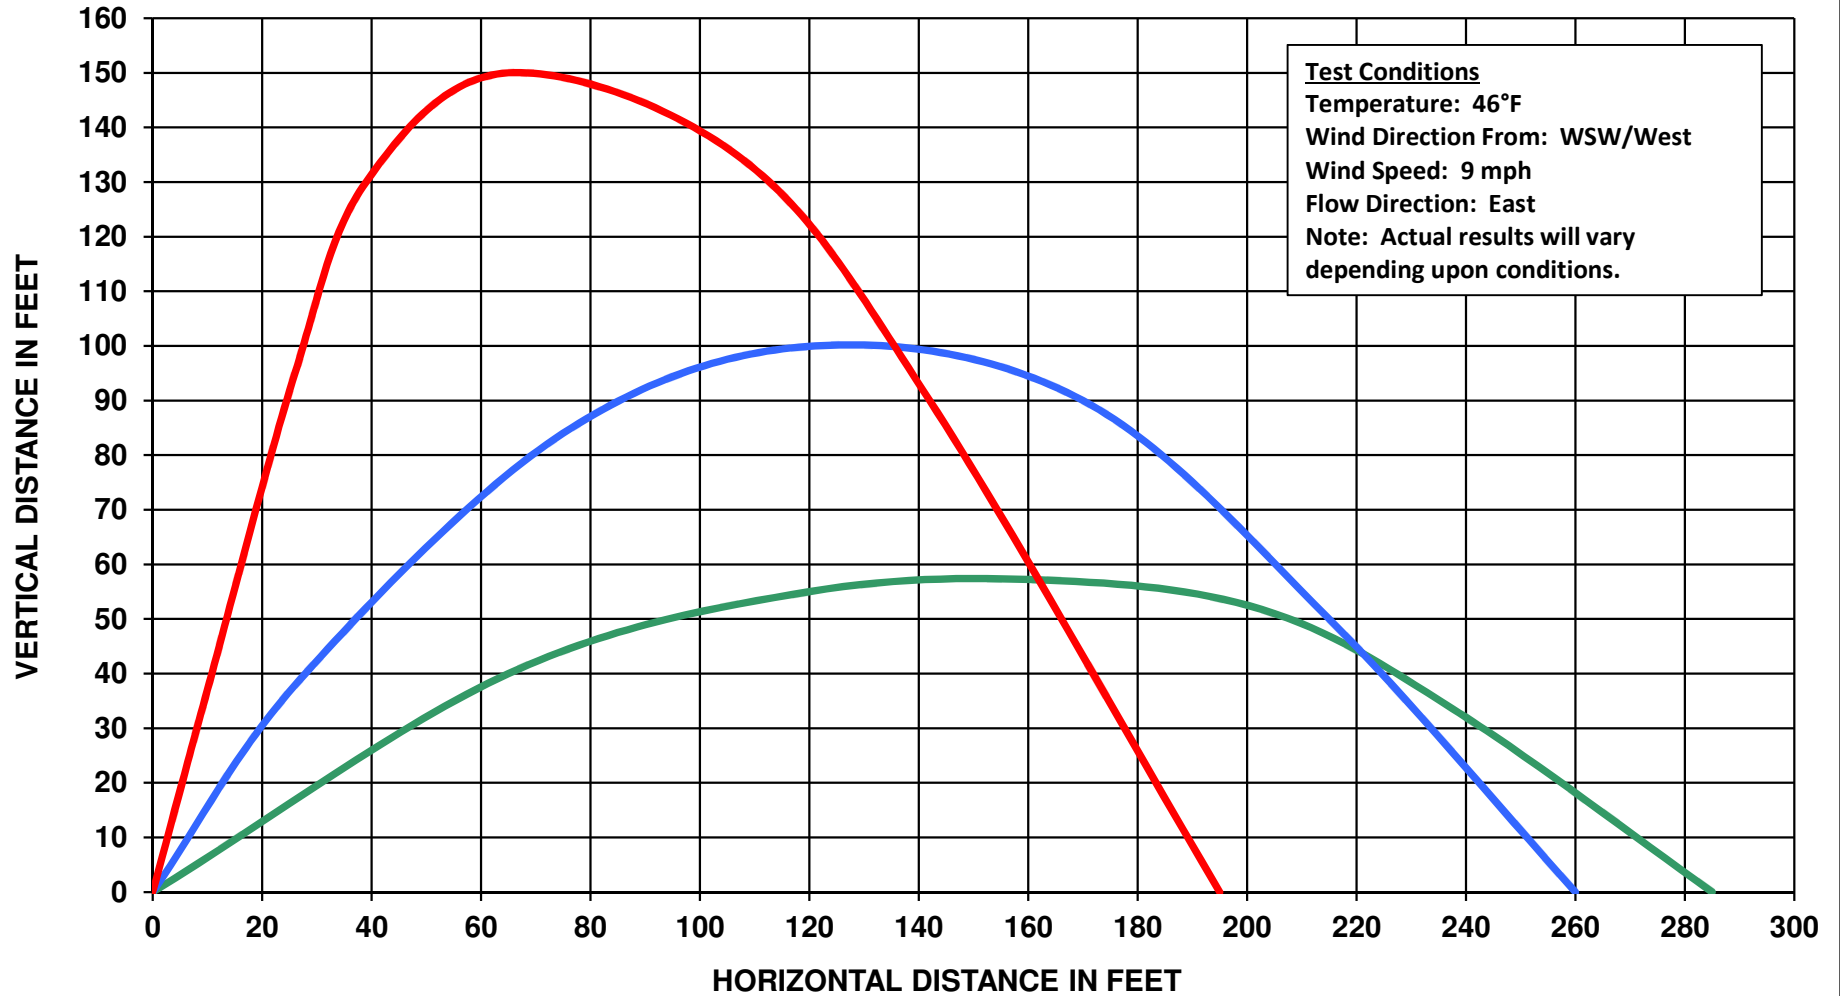

**CSW-L SERIES NOZZLES  
STRAIGHT STREAM REACH @ 1250 GPM  
WITH ELEVATIONS OF 32 , 55 , & 75 DEGREES**

— 32 DEGREES  
— 55 DEGREES  
— 75 DEGREES

