


**CSW-L SERIES NOZZLES
STRAIGHT STREAM REACH @ 350 GPM
WITH ELEVATIONS OF 32 , 55 , & 75 DEGREES**


— 32 DEGREES
— 55 DEGREES
— 75 DEGREES

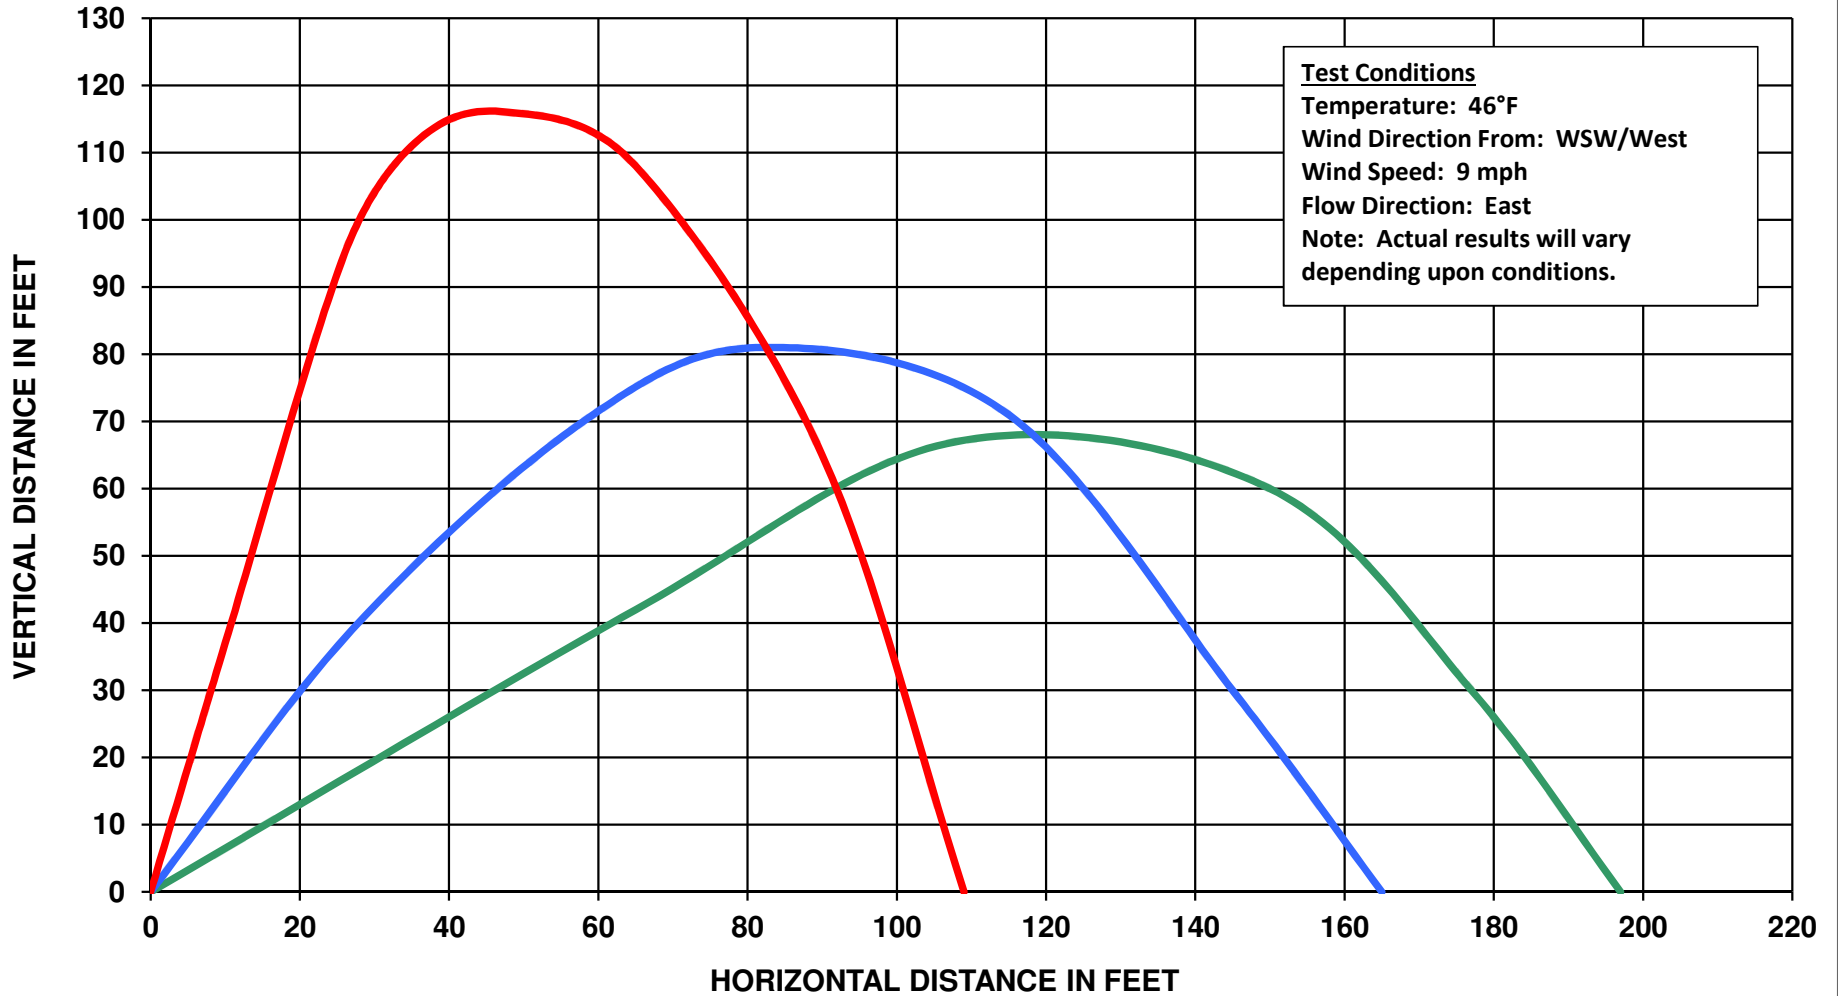

**CSW-L SERIES NOZZLES
STRAIGHT STREAM REACH @ 500 GPM
WITH ELEVATIONS OF 32 , 55 , & 75 DEGREES**


— 32 DEGREES
— 55 DEGREES
— 75 DEGREES

Test Conditions
Temperature: 46°F
Wind Direction From: WSW/West
Wind Speed: 9 mph
Flow Direction: East
Note: Actual results will vary depending upon conditions.

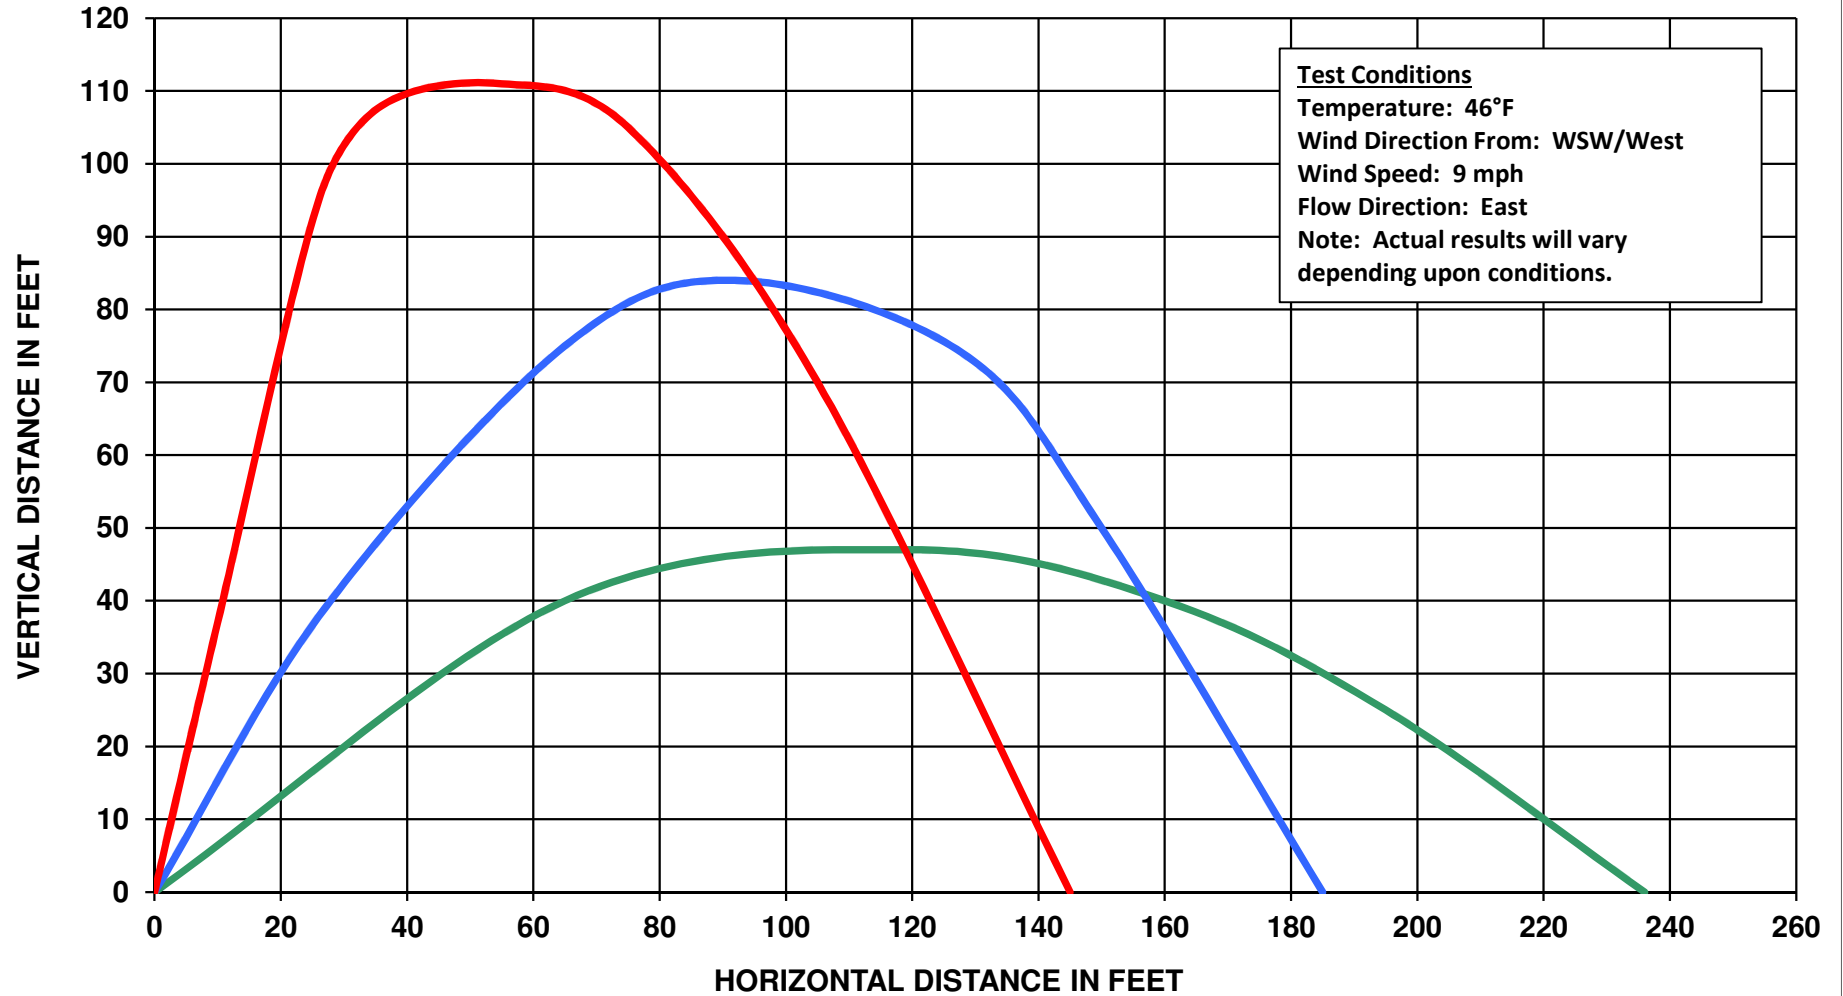

**CSW-L SERIES NOZZLES
STRAIGHT STREAM REACH @ 750 GPM
WITH ELEVATIONS OF 32 , 55 , & 75 DEGREES**


— 32 DEGREES
— 55 DEGREES
— 75 DEGREES

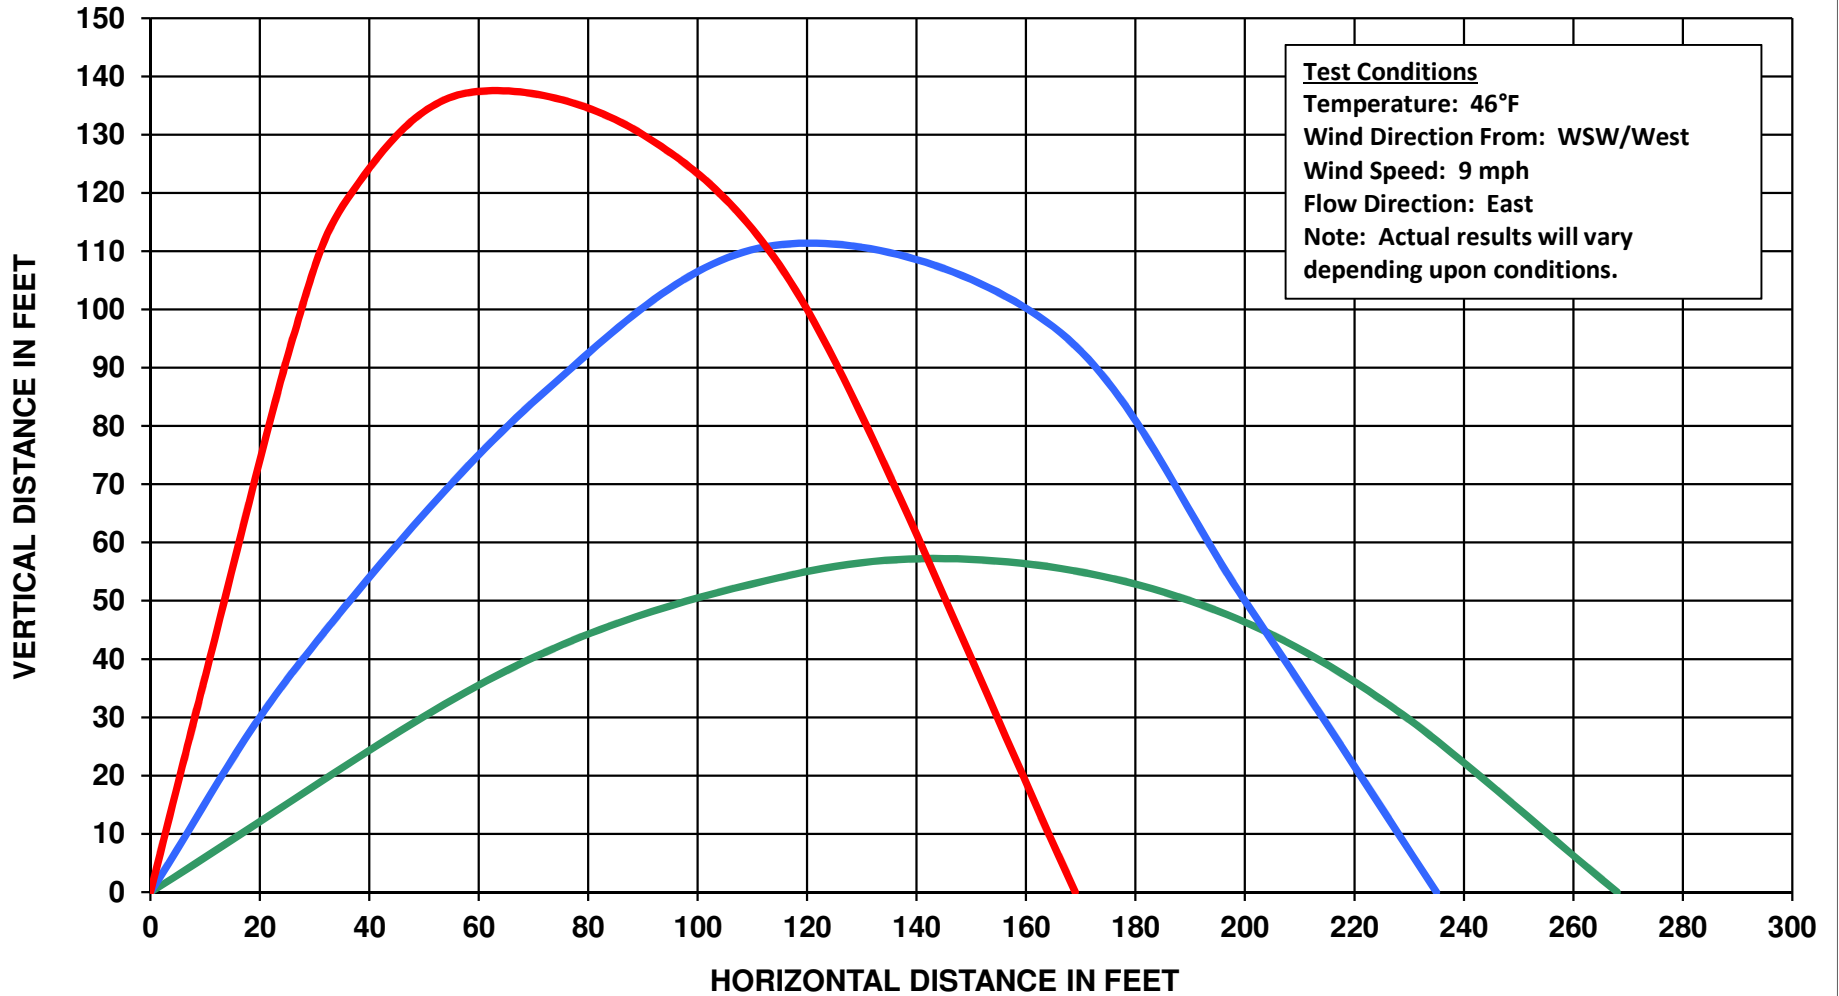

**CSW-L SERIES NOZZLES
STRAIGHT STREAM REACH @ 1000 GPM
WITH ELEVATIONS OF 32 , 55 , & 75 DEGREES**

— 32 DEGREES
— 55 DEGREES
— 75 DEGREES

Test Conditions
Temperature: 46°F
Wind Direction From: WSW/West
Wind Speed: 9 mph
Flow Direction: East
Note: Actual results will vary depending upon conditions.

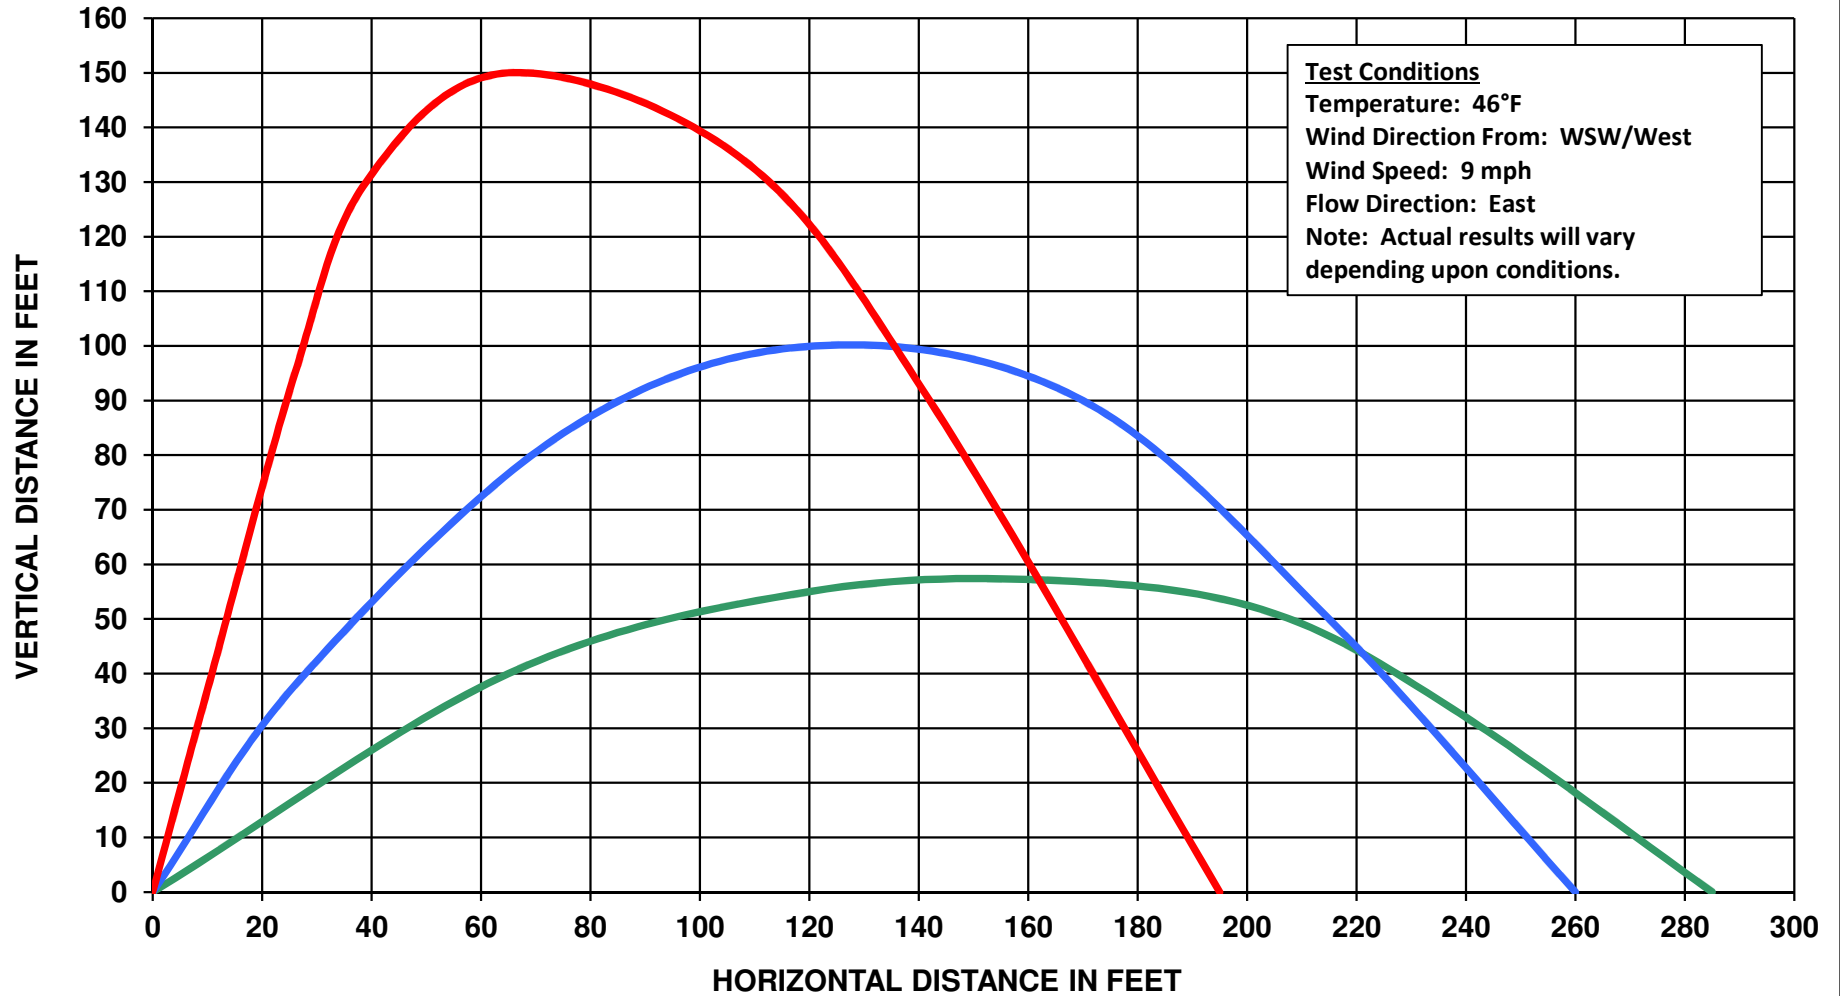

**CSW-L SERIES NOZZLES
STRAIGHT STREAM REACH @ 1250 GPM
WITH ELEVATIONS OF 32 , 55 , & 75 DEGREES**

— 32 DEGREES
— 55 DEGREES
— 75 DEGREES

