

CLEARLY, IT'S ALL ABOUT THE GPM



INTRODUCING THE SOLID STRIKE®

Go with the flow — the new solid stream Solid Strike® nozzle. Only from Elkhart Brass. Unsurpassed flow performance with flexibility that allows the nozzleman to vary GPM or reach without shutting down to change tip size. The result is an airless stream of water so tight you can virtually see through it. And with the precision and strength you need to penetrate the hottest fire.




Elkhart Brass
Fire Fighting Equipment

www.elkhartbrass.com

1.800.346.0250 | 1.574.295.8330


©2008 Elkhart Brass

SOLID STRIKE®

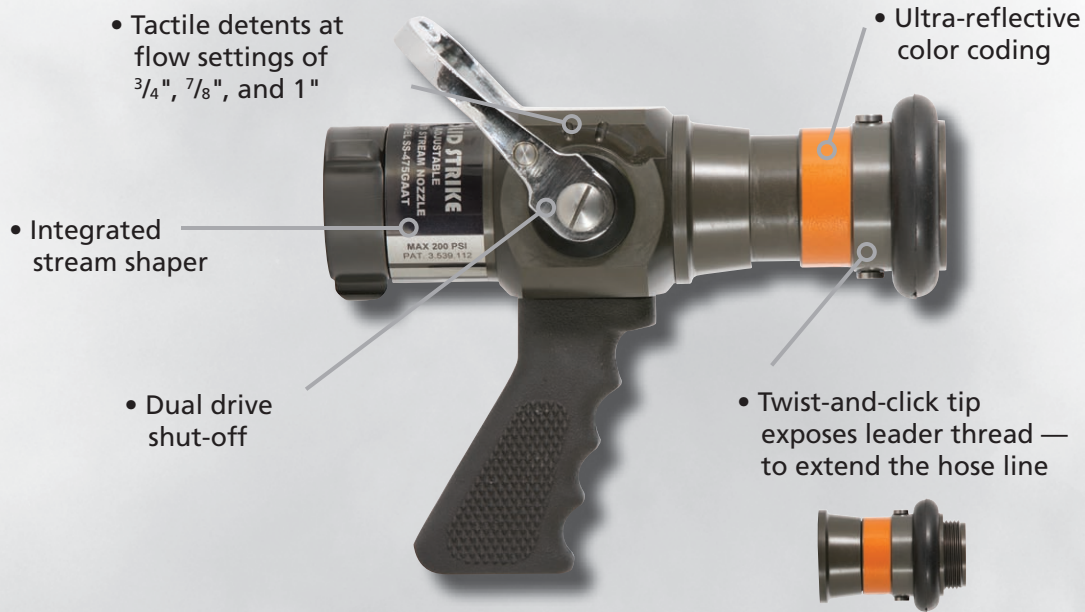

Operation

Operates like any traditional smooth bore tip on a shut-off except that the nozzleman has the ability to vary the effective tip size under flow. Choose greater reach, penetration and water — instantly.

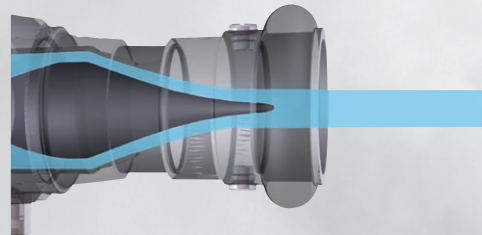

Construction

- Free swivel inlet
- Hard anodized, Teflon® impregnated aluminum alloy body and pistol grip
- Aluminum/bronze shut-off handle
- Delrin® adjustable hydrofoil

Rating

- Maximum operating pressure 200 psi
- Settings:
 - $\frac{3}{4}$ " – 118 GPM at 50 psi
 - $\frac{7}{8}$ " – 159 GPM at 50 psi
 - 1" – 209 GPM at 50 psi

How it works:

Unlike a traditional smooth bore tip, the Solid Strike® utilizes the hydraulic forces of the water flow itself to converge and project a perfect solid stream of water at near identical exit velocity — maximizing the stable range of the stream.



Elkhart Brass
Fire Fighting Equipment

www.elkhartbrass.com
1.800.346.0250 | 1.574.295.8330